


Rear view

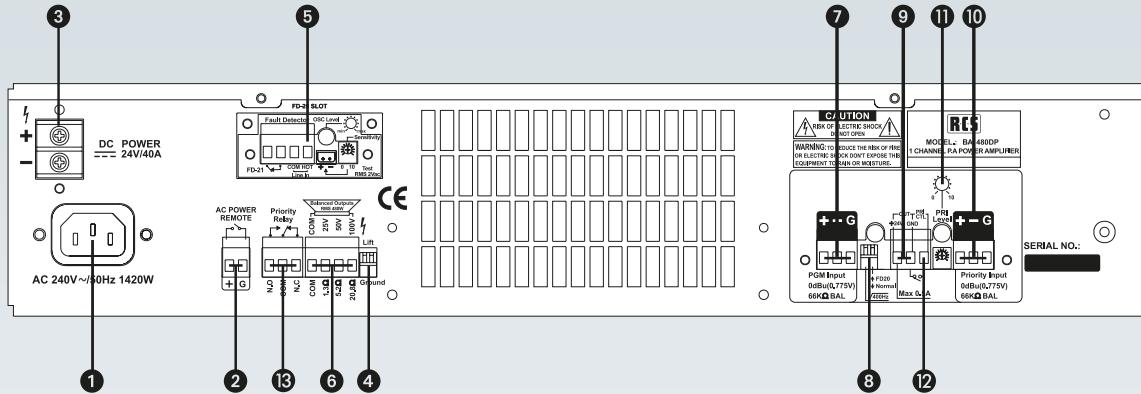

- 1 IEC power inlet (cold condition)
- 2 Remote switch-on via „Power Remote“
- 3 24 V DC power supply terminal
- 4 Groundlift switch
- 5 Integrated pilot tone-module FD-21 (optional)
- 6 Speaker outputs, 25 V, 50 V and 100 V
- 7 Input on screw-type connectors
- 8 Switches for high-pass filter (400 Hz) and FD-21 module
- 9 24 V (500 mA) output for switching external relays or similar units
- 10 Balanced input for priority signal
- 11 Volume control for priority signal
- 12 Contact for priority enable
- 13 Change-over contact for priority

Technical data	BA-240 DP	BA-480 DP
Output power	240 W (RMS)	480 W (RMS)
Input sensitivity	0 dB (0,775 V), 66 kohms, balanced.	0 dB (0,775 V), 66 kohms, balanced.
Output impedance	25 V, 50 V, 100 V	25 V, 50 V, 100 V
Frequency range	35 ~ 20.000 Hz (better than -3 dB)	35 ~ 20.000 Hz (better than-3 dB)
Signal-to-noise-ratio	better than 100 dB	better than 100 dB
THD at 1 kHz	better than 0,5%	better than 0,5 %
Input filter	400 Hz / -3 dB	400 Hz / -3 dB
Power consumption	735 W	1420 W
Current consumption (230 V)	1,6 A at 1/8 power current draw 3,75 A at rated power current draw	3,1 A at 1/8 power current draw 7,4 A at rated power current draw
AC power supply	230 V, 50 – 60 Hz	230 V, 50 – 60 Hz
DC power supply	24 V (emergency power supply)	24 V (emergency power supply)
Dimensions (WxHxD)	483 x 88 x 374; 2 RU	483 x 88 x 374; 2 RU
Weight	approx. 14,5 kg	approx. 18,5 kg

OPTIONAL | Pilot Tone-Module

FD-21

Description

This pilot tone-module serves to monitor the performance of amplifiers. It is installed in the slot provided on power amplifiers of the „DP“ series. The generator produces a 20 kHz test signal.

Apart from the DC test of the power amplifier functioning, the speaker line is checked for short circuit faults. Error message from a potential-free relay contact (closer).



Pilot Tone-Module for power amplifiers of the „DP“ series. **FD-21**

1-CHANNEL POWER AMPLIFIER WITH PILOT TONE

RCS

BA-240 DP
240 W

BA-480 D
480 W

Balanced inputs for programs, **priority** and **pilot tone-module**



Description

These 19" 1-channel power amplifiers are **fully monitored** and ideal for the use in professional audio applications with 100V, 70 V and 25 V line systems.

The devices are manufactured in state-of-the-art production processes using high-quality components such as toroidal transformers.

They have been designed for continuous operation. They are absolutely short circuit and open circuit proof and are equipped with all relevant protection devices.

Please consider the following features:

- All the amplifiers of the „DP“ series have one electronically balanced audio input for programs and one input (with priority) for priority announcements, etc.
- Each power amplifier can be equipped with 1 pilot tone-module (FD-21) which monitors the performance of the amplifier.
- The amplifiers have electronically balanced inputs and outputs on screw-type connectors. Possible hum pick-up from ground loops is avoided through the balanced inputs and outputs.
- The screw-type connectors substantially facilitate the wiring for signal input. Time consuming fitting of the input cables with XLR connectors is eliminated.
- The multicoloured LED indicators located on the front panel continuously indicate the operating status of the amplifier including protection functions and possible dangers.

- By means of a „Power Remote“ contact the amplifier can be switched on, even if the power switch is in the off position
- All models feature soft start and a special circuit which suppresses unpleasant switch-on noise.
- A groundlift switch is provided to disconnect signal ground from chassis ground (shielding), in order to avoid any hum pick-up.

★

Model designations

1-Channel Power Amplifier,BA-240 DP
240 W RMS, 2 RU, prepared for FD-21

1-Channel Power Amplifier,BA-480 DP
480 W RMS, 2 RU, prepared for FD-21